


New
&
Improved

Model 122

Single phase, duplex alternating pump control with override.

Model Shown 1221W114X

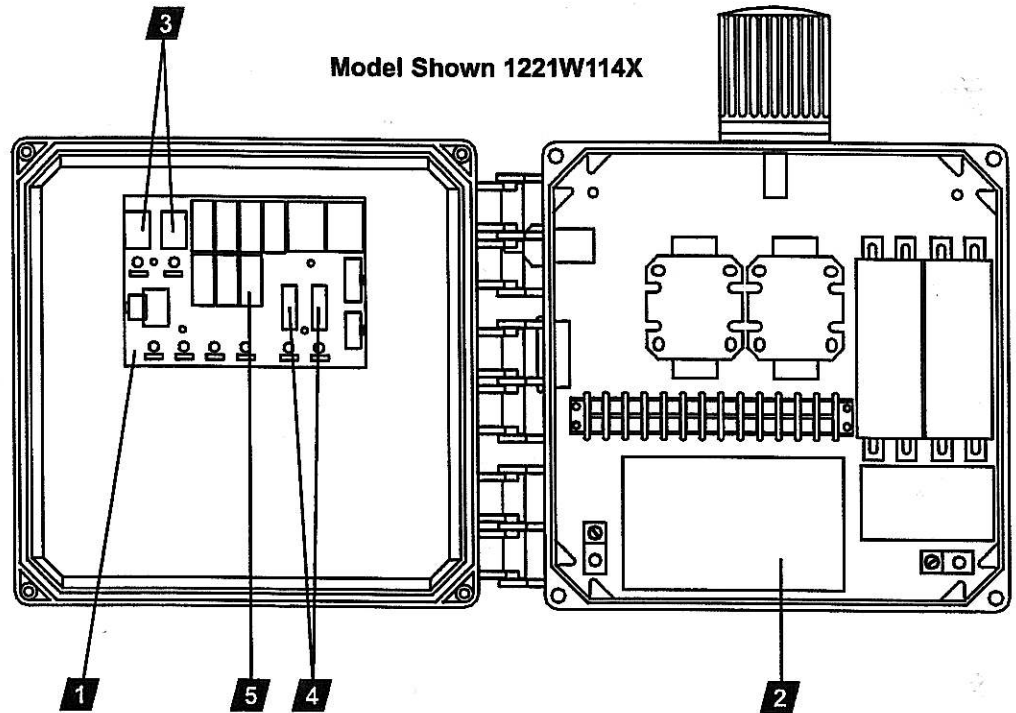

New Features:

1. Circuit board is mounted to the inside cover.
2. Additional space for easier wiring.
3. Easier access to HOA switches mounted on circuit board.
4. Separate control and alarm circuit fuses are mounted on circuit board.
5. Auxiliary alarm contact now comes standard.

The **Model 122** control panel is designed to alternately control two 120, 208 or 240V single phase pumps in water, wastewater and sewage applications.

The redesigned **Model 122** panel features the circuit board mounted to the inside cover which provides additional space for wiring the panel and easier access to HOA switches, control and alarm fuses, and lead/lag selector switch (optional) which are located on the circuit board.

In addition to alternating pump control, this system provides override control should either pump fail. The control and alarm circuits are fused separately, so if one fuse blows there is still power to the other circuit. **Auxiliary alarm contact** is now standard! The **Model 122** panel is **UL/cUL Listed** and backed by a **three-year** limited warranty.



POLYLOK™ Inc.

Innovations in Precast, Drainage
& Wastewater Products



Zabel®
A Division of Polylok Inc.

3 Fairfield Blvd, Wallingford, Connecticut 06492
Office: 1-877-765-9565 Fax: 203-284-8514
email: sales@polylok.com
Web site: www.polylok.com

MODEL 122 Control Panel


Single phase, duplex alternating pump control with override.

The Model 122 control panel is designed to alternately control two 120, 208, or 240 VAC single phase pumps in water and sewage installations. The alternating action equalizes pump wear. In addition to the alternating pump control, this system provides override control should either pump fail. If an alarm condition occurs, an alarm switch activates the audio/visual alarm system. Common applications include pump chambers, sump pump basins, irrigation systems and lift stations.

PANEL COMPONENTS

1. **Enclosure** measures 10 X 10 X 6 inches (25.4 X 25.4 X 15.24 cm). Choice of NEMA 1 (steel for indoor use), or NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for outdoor or indoor use). **Note:** Options selected may increase enclosure size and change component layout.
2. **Magnetic Motor Contactors** control pumps by switching electrical lines.
3. **HOA Switches** for manual pump control (mounted on circuit board).
4. **Control Circuit Board** provides pump control and alternation.
5. **Green pump Run Indicator Lights** (mounted on circuit board).
6. **Circuit Breakers** (optional) provide pump disconnect and branch circuit protection.
7. **Ground Lugs**
8. **Float Status Indicator Lights** (mounted on circuit board).
9. **Control and Alarm Power Indicator Lights** (mounted on circuit board)
10. **Auxiliary Alarm Contact**, form C (mounted on circuit board).

NOTE: Schematic is located inside the panel on enclosure cover.

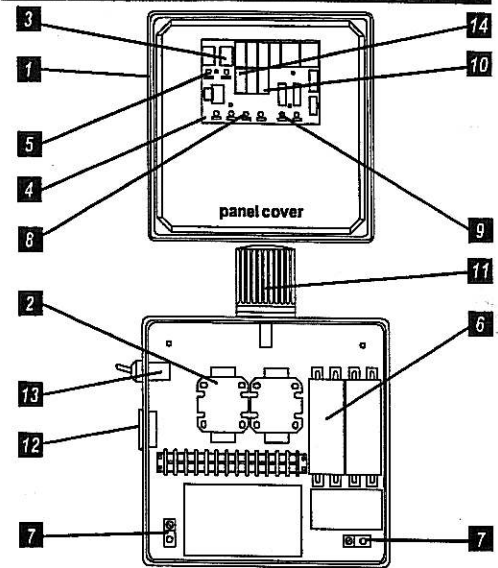

Model Shown 1221W114X6A

STANDARD ALARM PACKAGE

11. **Red Alarm Beacon** provides 360° visual check of alarm condition. **Note:** NEMA 1 style utilizes a door mounted indicator in lieu of a beacon.
12. **Alarm Horn** provides audio warning of alarm condition (83 to 85 decibel rating). **Note:** NEMA 1 style utilizes an internally mounted buzzer in lieu of horn.
13. **Exterior Alarm Test/Normal/Silence Switch** allows horn and light to be tested and horn to be silenced in an alarm condition. Alarm automatically resets once alarm condition is cleared.
14. **Horn Silence Relay** (mounted on circuit board).

NOTE: other options available.

FEATURES

- Entire control system (panel and switches) is UL Listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes three 20' Sensor Float® control switches
- Complete with step-by-step installation instructions
- Three-year limited warranty



3 Fairfield Blvd, Wallingford, Connecticut 06492
Office: 1-877-765-9565 Fax: 203-284-8514
email: sales@polylok.com
Web site: www.polylok.com

SEE BACKSIDE FOR COMPLETE LISTING OF AVAILABLE OPTIONS.

122

6A

MODEL 122

ALARMPACKAGE

- 0 = select options or no alarm package
- 1 = alarm package (includes test/normal/silence switch, fuse, red light, & horn)

ENCLOSURERATING

- I = Indoor, NEMA 1 (metal)
- W = Weatherproof, NEMA 4X (engineered thermoplastic)

STARTING DEVICE

- 1 = magnetic motor contactor 120/208/240V
- 9 = magnetic motor contactor 120V only

PUMP FULL LOAD AMPS

- 0 = 0-7 FLA
- 1 = 7-15 FLA
- 2 = 15-20 FLA
- 3 = 20-30 FLA

PUMP DISCONNECTS

- 0 = no pump disconnect
- 4 = circuit breaker 120V (select STARTING DEVICE option 9 above)
120/208/240V (select STARTING DEVICE option 1 above)

FLOAT SWITCH APPLICATION

- H or L = pump down or pump up
- X = no floats

OPTIONS *Listed below*

ENCLOSURE UPSIZE

If you selected one or more of the ★ options, or two ★★ options, a one-time enclosure upsize fee would apply.

If additional features are required, call the factory for a quote on an Engineered Custom control panel.

CODE DESCRIPTION

- 1A Red beacon only / no audio
(must select "0" for alarm package)
- 1C Horn only / no visual
(must select "0" for alarm package)
- ★★ 3A Alarm flasher
- ★ 3B Manual alarm reset
- ★ 4A Low level cutout
(select Option 4D if floats included)
- 4B Red low-level indicator & alarm
(must select Option 4A also)
- 4D Redundant off float switch
- ★ 5A Thermal cutout/heat sensor auto reset
(for pumps w/thermal switch leads)
- ★ 5E Seal failure circuit & red indicator (2 wire)
- 6A Auxiliary alarm contact, form C
(included as standard)
- ★ 8A Elapsed time meter
- ★ 8C Event (cycle) counter
- ★ 9_A Pump overload
specify amperage after number 9 followed by letter "A".
Example: 912A = 12 amp pump.
- ★ 0-25 FLA
- ★ 25-30 FLA
- 10E Lockable latch - NEMA 4X
- 10E Lockable latch - NEMA 1

CODE DESCRIPTION

- ★ 10F Lightning arrestor
(must select circuit breaker)
- ★★ 10K Anti-condensation heater
- 11C NEMA 1 alarm panel
- 11D NEMA 4X alarm panel
- ★ 14B Main disconnect *(rotary style, mounted through door, non-fused)*
(must select circuit breaker)
- ★ 0-20 FLA (total of both pumps)
- ★ 20-60 FLA (total of both pumps)
- 16A 10' cord in lieu of 20' *(per float)*
- 16B 15' cord in lieu of 20' *(per float)*
- 16C 30' cord in lieu of 20' *(per float)*
- 16D 40' cord in lieu of 20' *(per float)*
- 17A SJE SignalMaster® / pipe clamp ● *(per float)*
- 17B SJE SignalMaster® / externally weighted ● *(per float)*
- 17C Sensor Float® / internally weighted ▲ *(per float)*
- 17D Sensor Float® / externally weighted ▲ *(per float)*
- 17E Sensor Float® Mini / pipe clamp ▲ *(per float)*
- 17F Sensor Float® Mini / externally weighted ▲ *(per float)*
- 19B Lead lag selector switch
- 19F Fourth float to separate alarm function from lag
- 19T TOA (Test/Off/Automatic) switches and pump run lights through door mounted
- 19U HOA (Hand/Off/Automatic) switches and pump run lights through door mounted
- 19X Door mounted pump run indicator
● Mechanically-activated ▲ Mercury-activated

SAMPLE

MODEL **122** **1** **W** **9** **0** **4** **H** **6A BAC**

