





3 Fairfield Blvd, Wallingford, Connecticut 06492
Office: 1-877-765-9565 Fax: 203-284-8514
email: sales@polylok.com
Web site: www.polylok.com


SmartFilter® Alarms 3014AB AC-A-O-SF

Features

- Provides audible and visual notification of impending filter and tank servicing
- Patented SmartFilter switch attaches to all Zabel® Filters
- Alarm sounds when tank and filter reach 90% maturity
- For indoor/outdoor use

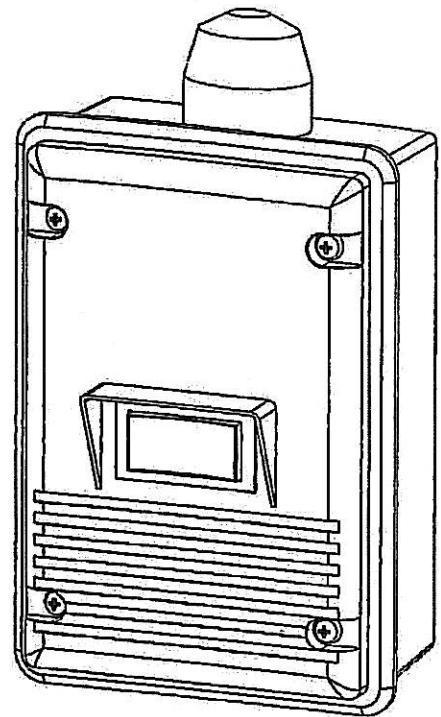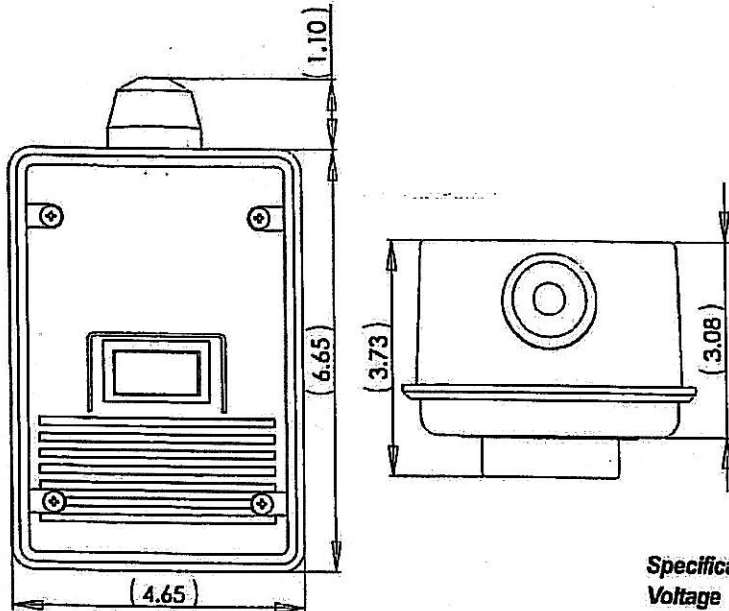

Product Information 055 / Pricing 205

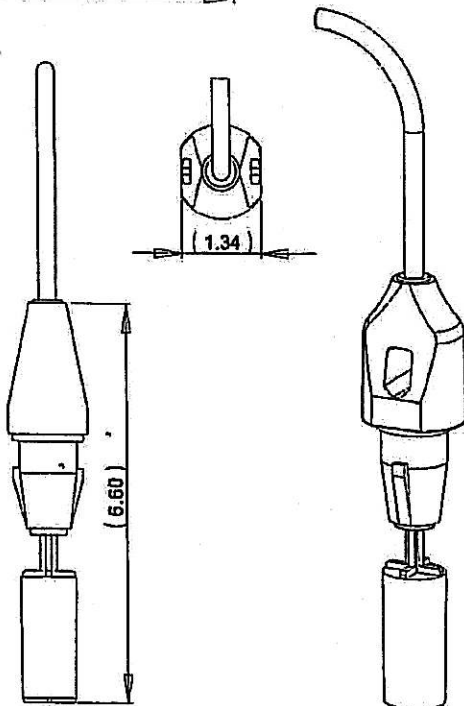

Specifications

Voltage

- 120 VAC, 50/60 Hz, 7 watts max. (alarm condition)

Alarm enclosure

- 6.5x4.5x3.0 inch (16.51x11.43x7.62 cm), indoor-outdoor, weatherproof, thermoplastic meets 3R water-tight standards

Alarm horn

- 82 decibels at 10 feet

Alarm beacon

- Meets Type 3R water-tight standards as installed by factory

Test/Silent Switch

- Certified to IP66 and IP68 standards

Switch

- SmartFilter switch with 5' cord

Warranty for Defects in Material and Workmanship

- AC-A-O-SF - 3 Years

AutoCad R-14 dwg files at www.zabelzone.com/autocad.htm

