

SJE VERTICALMASTER® Pump Switch

Mechanically-activated switch designed for direct control of pumps up to 1/2 HP at 120 VAC and 1 HP at 230 VAC.

This mechanically-activated pump switch is designed to operate in non-potable water and sewage applications with limited space. It works well in small sump chambers, effluent applications, and laundry trays, as well as in large tanks.

The SJE VerticalMaster® pump switch is not sensitive to turbulence.

It is available for pump down applications only.




U.S. Patent No. 5,155,311
Canadian Patent No. 2,060,748

FEATURES


- Heavy-duty contacts.
- Controls pumps up to 1/2 HP at 120 VAC and 1 HP at 230 VAC.
- Adjustable pumping range of .75 to 6.5 inches (2 to 17 cm).
- Includes standard boxed packaging.
- UL Recognized for use in non-potable water and sewage.
- CSA Certified.
- Three-year limited warranty.



Pump Down / ON position

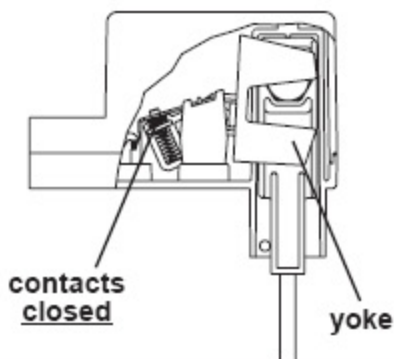

Pump Down / OFF position

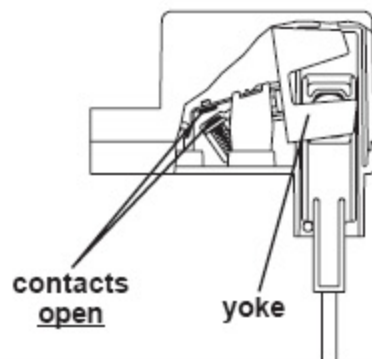

OPTIONS

This switch is available:

- with a 120 VAC or 230 VAC piggy-back plug.
- without a plug for direct wiring in 120 VAC or 230 VAC applications.
- in standard cable lengths of 10, 15, 20, or 30 feet and 3, 5, 6, or 10 meters (longer lengths available).

SPECIFICATIONS

CABLE: flexible 16 gauge, 2 conductor (UL, CSA) SJOW or SJTOW, water-resistant (CPE)

MOUNTING BRACKET & HOSE CLAMP: stainless steel

LIFT ROD: injection molded acetal plastic

FLOAT STOP: neoprene

SWITCH AND FLOAT HOUSING: high impact, corrosion resistant, PVC housing for use in sewage and non-potable water up to 125°F (52°C)

overall dimensions: 12 inch high x 5 inch x 3 inch wide (30.5 cm high x 12.7 cm x 7.6 cm wide)

switch housing dimensions (excluding cable entrance): 2 inch high x 2.8 inch wide (5 cm high x 7.1 cm wide)

float housing dimensions: 2.3 inch high x 2.7 inch wide (5.8 cm high x 6.9 cm wide)

ELECTRICAL:

120 VAC 50/60Hz Single Phase:

Maximum Pump Running Current:

13 amps

Maximum Pump Starting Current:

60 amps

Recommended Pump HP:

1/2 HP or less

230 VAC 50/60Hz Single Phase:

Maximum Pump Running Current:

12 amps

Maximum Pump Starting Current:

60 amps

Recommended Pump HP:

1 HP or less

NOTE: This switch must be used with pumps that provide integral thermal overload protection.